



GT-1175

Automatic Sliding Door
with Breakout Function



Product Features and Benefits

Full swing-open doors evacuate many people speedily to avoid a panic in case of emergency

Suitable for Skyscrapers, Apartments, Airports, and Shopping malls

Convenient use for carrying bulky items through wide clearance

Variety of designs aesthetically suit diverse locations

Features of GT-1175

① For evacuation



In case of dangerous circumstances such as a fire or power outage due to earthquake, the door can be opened 90 degrees outwards singlehandedly to facilitate escape.

GT-1175 is suitable for places with high visitor traffic such as airport, hospital, metro, high-speed railway station, shopping mall, supermarket and car store.

② For carrying bulky items



It is very useful in case of carrying large-sized items in events place, such as exhibition center, exhibition hall of shopping mall, car store and other places where vehicles and other large-sized items are displayed.


GT-1175B0-FO (SLM)

Reference

Slim frame / Sliding door with breakout function



Drawings

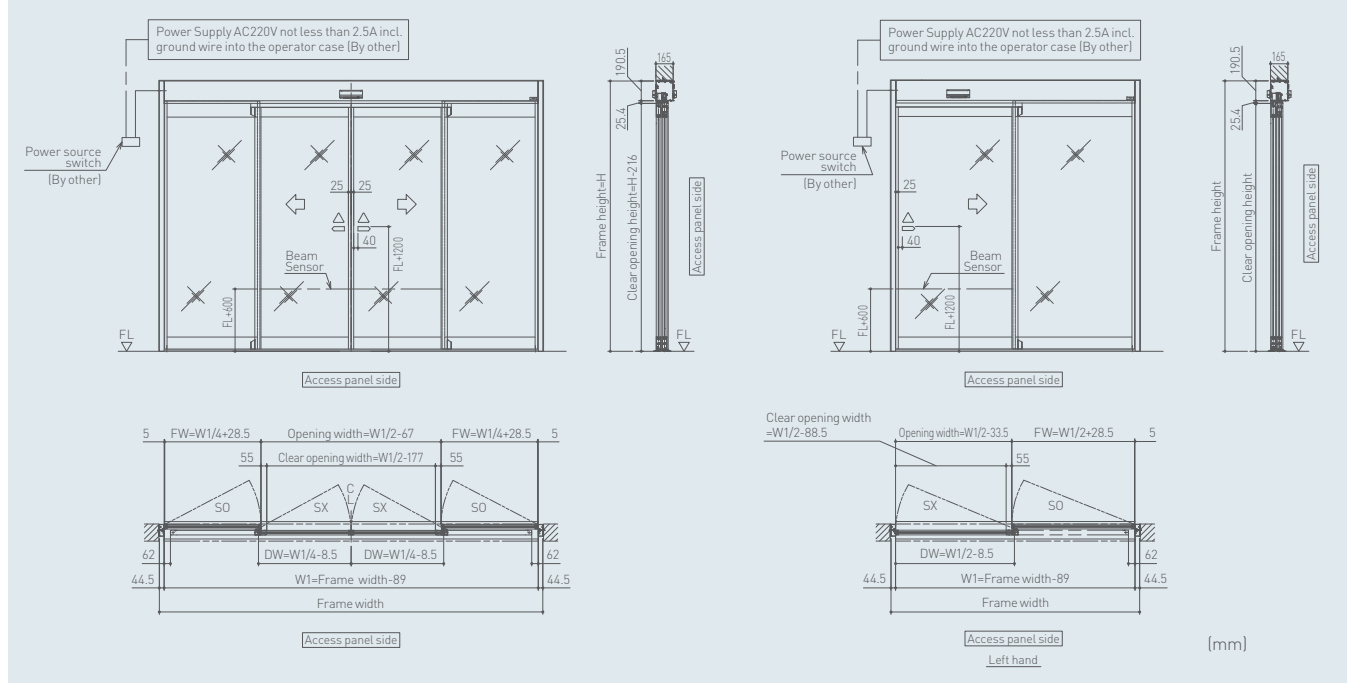


GT-1175B0-FO (AG)

Reference

Full-glass / Sliding door with breakout function



Drawings

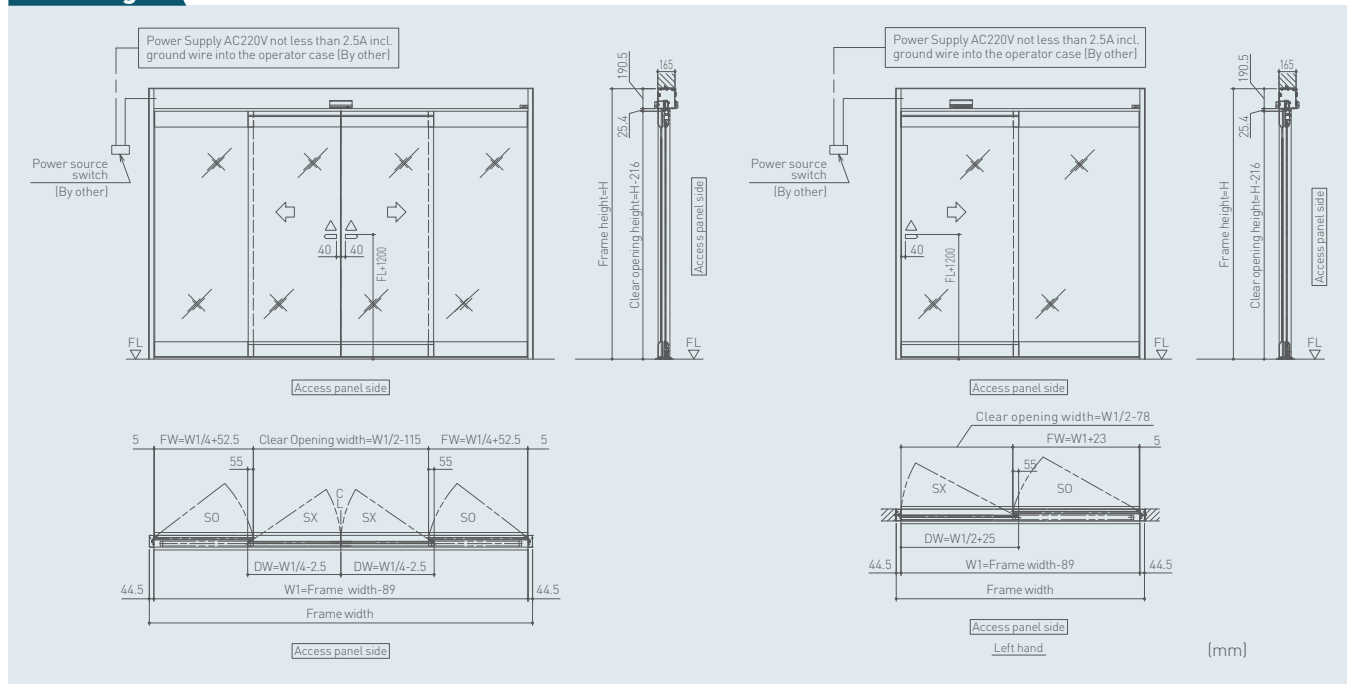









GT-1175BO-TP

Reference

Robust frame / Telescopic door with breakout function



Drawings

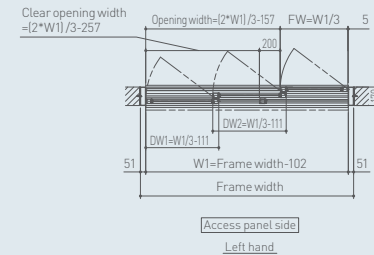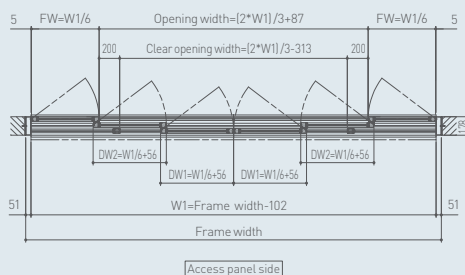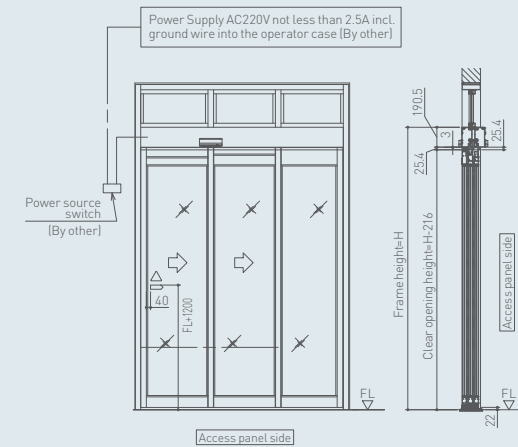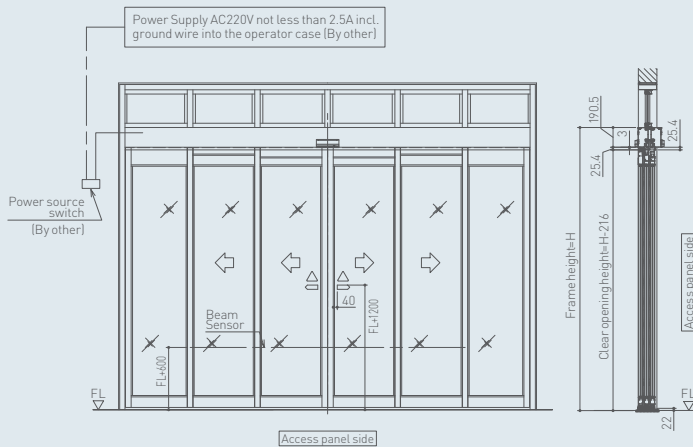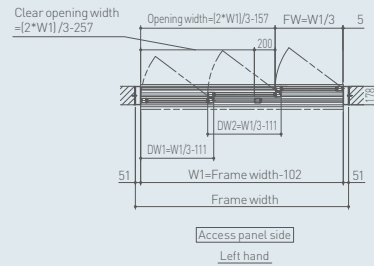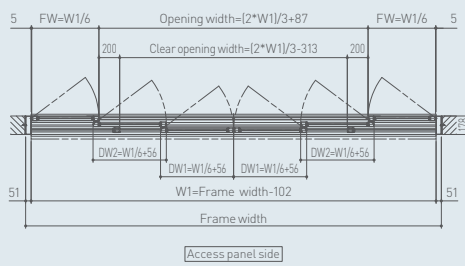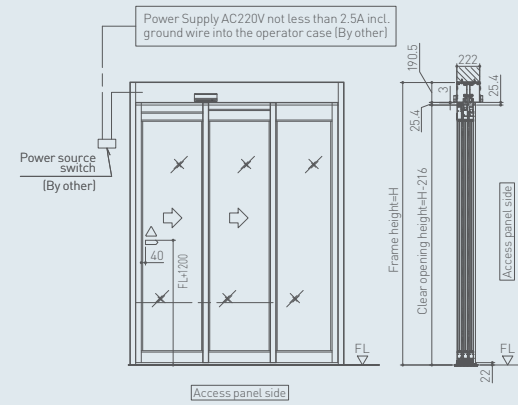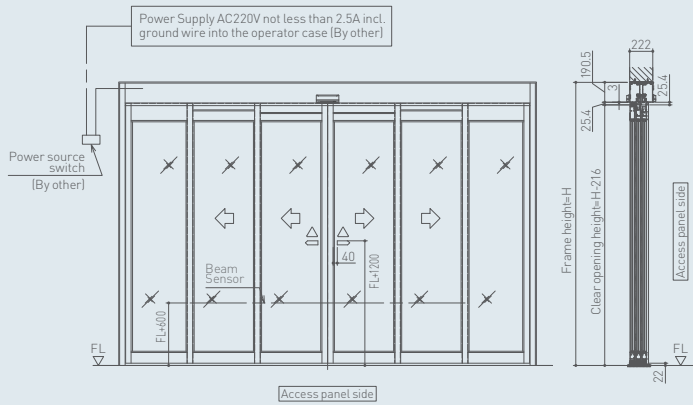


(mm)

Reference





Robust frame / Sliding door with breakout function



Drawings

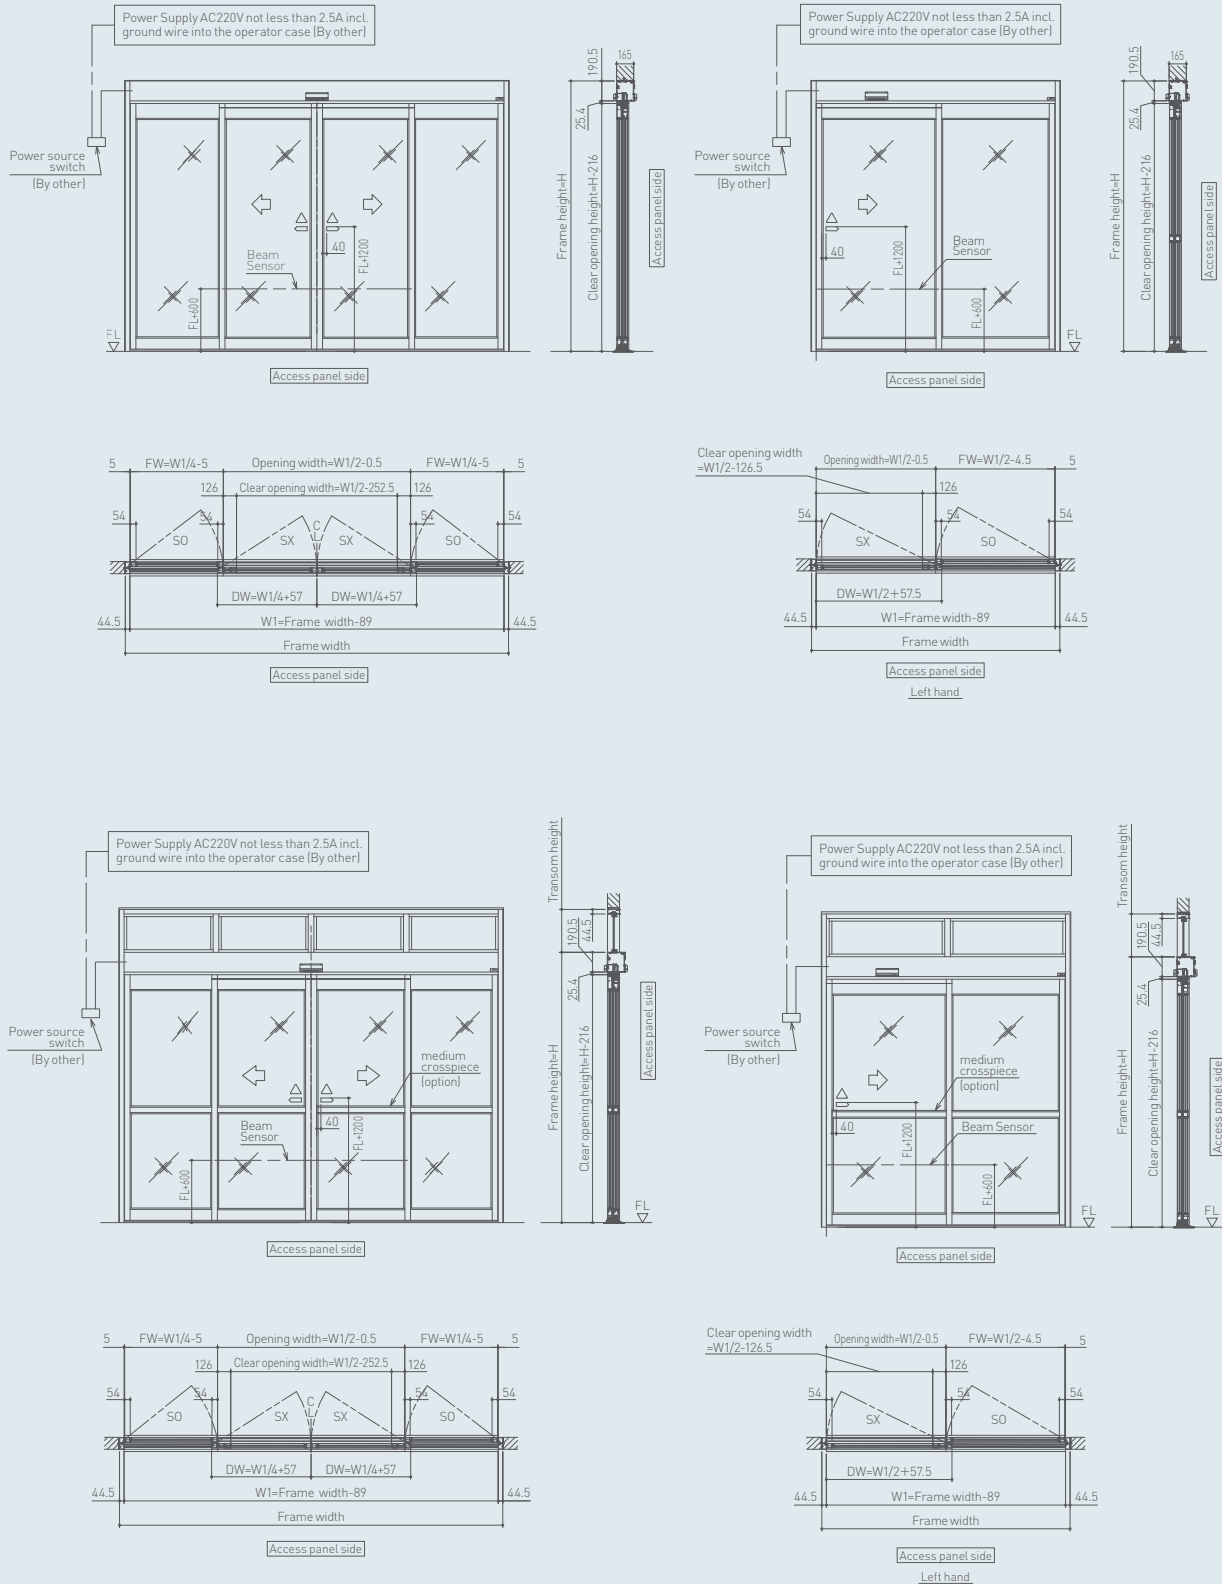

Range table (Bi-parting)

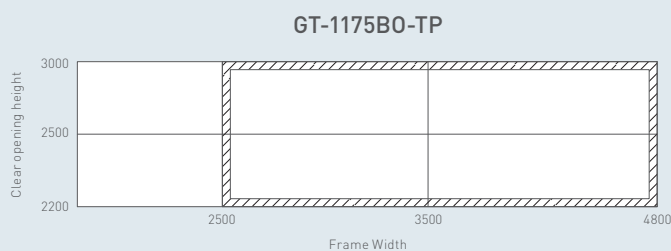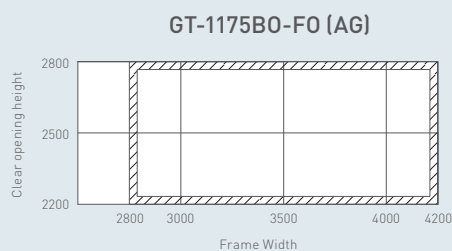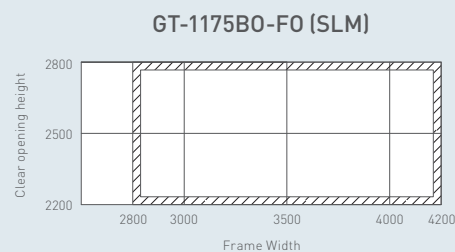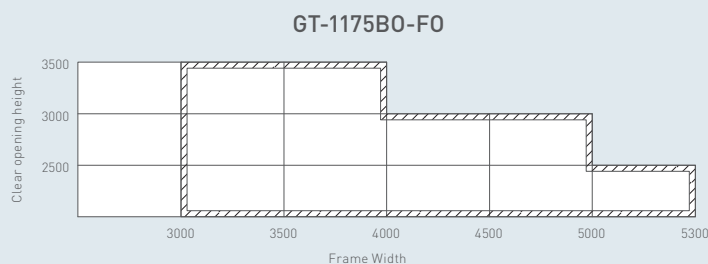

GT-1175BO-FO / FO(SLM) / FO(AG) / TP Specification

Product Name	GT-1175BO-FO	GT-1175BO-FO (SLM)	GT-1175BO-FO (AG)	GT-1175BO-TP
Door type	Normal Sliding			Telescopic
Configurations	Single, Bi-part / Full breakout			
Mounting	Concealed			
Door frame	Robust	Slim	Full-glass	Robust
Sash material	Aluminum			
[Standard finish]	Clear anodized			
[Optional finish]	Painted (Black,Blonze,White)			
Glass	Tempered glass 10 or 12mm	Tempered glass 10mm	Tempered glass 12mm	Tempered glass 10 or 12mm
Threshold	Surfaced *1			
Door Stop Material	Rubber *2			
Transom (Option)	Available *3			
Manual lock (Option)	Door center	Door bottom	Door bottom	Door center
Kick plate (Option)	254mm	—	—	254mm

※1 Recessed type is also available as an option

※2 Mohair type is also available as an option

※3 Only 1 type of the frame thickness is available

Nabtesco Corporation

Accessibility Innovations Company

Address : JA Kyosai Bldg., 7-9,
Hirakawacho 2-chome,
Chiyoda-ku, Tokyo,
102-0093, Japan

Phone : +81(0)3-5213-1157

Fax : +81(0)3-5213-1173



ISO9001 • ISO14001 Certified



For further details, please contact:

<https://nabco.nabtesco.com/en/>

All specifications herein are subject to change without notice

CAT.No. D686 0602 1905 02R1